




Metallic Decorative Coating System™

Metallic Coating System creates a stunning look that can resemble a marbled three-dimensional surface. A metallic pigment powder is added to a clear coating resin binder to obtain a variety of decorative looks.

The system described below is EPIC's standard system. However, EPIC has several other product options (components) which may be substituted in order to suit your individual performance needs. Consult your EPIC sales representative for details.

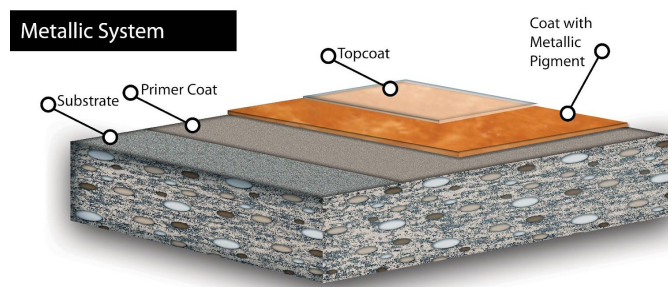

BENEFITS

- Creates a unique one of a kind look
- Random patterns can be achieved depending on the creativity and experience of the installer
- Colors can be intermixed; allowing unlimited color variations
- Great for a variety of residential, commercial and retail applications

RECOMMENDED FOR

- Offices
- Retail Areas
- Hospitality Industry
- Bars and Restaurants
- Garages/Basements

EPIC also has available several crack fillers, joint sealant, and other support products. Please inquire with your sales representative for more information on these products

SYSTEM COMPONENTS (approx 16 to 36 mils)

Coat	Product	Mix Rate	Coverage
Primer	DC130 High Build Primer	2:1	133-267 sf/gallon
Body	DC220 High Performance Epoxy w/Metallic Pigment	2:1	90-100 sf/gallon
Topcoat	DC400 High Performance Urethane Topcoat	See tech data	600 sf/gallon

PHYSICAL PROPERTIES

Property	Test Method	Result
Adhesion		430 psi (concrete failure)
Flexural Strength	ASTM D790	7,400 psi
Compressive Strength	ASTM D695	11,200 psi
Tensile Strength	ASTM D638	7,600 psi
Elongation		4.1%
Impact Resistance		50-inch lbs. direct
Abrasion Resistance	CS-17 1000/500	15-20 mg
Gloss	Glossmeter	20-40 @ 60°
Application Temperature		60° to 90° F

*Refer to individual data sheets for preparation, mixing and application instructions as well as product limitations, limitations of liability, warranty information, and common chemical resistance information.